





Station Code

TOPP

Recording Station

PIAN DEL TOPPO

Network

OX

	Year	Month	Day
First compilation	1970	01	01
Last update	1970	01	01

General Information

Sensor

Sara SA10BH (1241) SM

Station photograph		Image not available		
Code	TOPP			
Owner	CRS Centro di Ricerche Sis	smologiche, OGS		
Housing				
Instrumentation				
	Digitizer	Installation		
Sara SL06 (1147) D		2016-01-01 00:00:00		
	Sensor	Installation	Orientation	Location
Sara SA10 (1204) SM		2016-01-01 00:00:00	ENZ	Surface
	Digitizer	Installation		
Sara SL06 (1147) D		2016-01-01 00:00:00		
1		1 (- 11 - ('		

Installation

2016-01-01 00:00:00

Orientation

ENZ

Location

Depth

Geographical Information (1/2)

Location

Region FRIULI-VENEZIA GIULIA


Province Pordenone

City TRAVESIO

Place / Address Pian del Toppo

ISTAT Code 093047

Notes

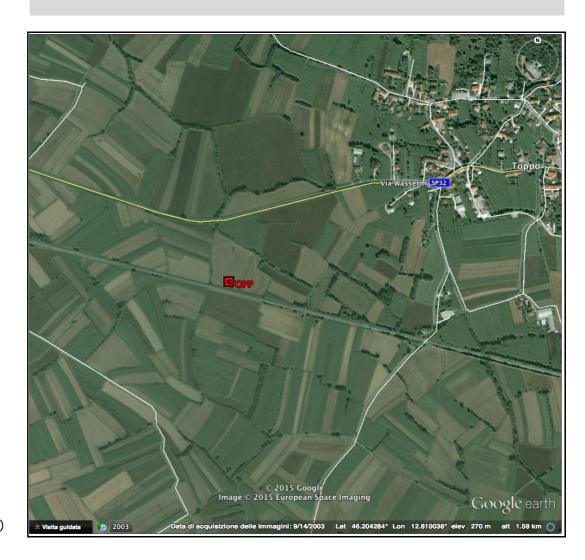


Location map (Italy and Region)

Geographical Information (2/2)

Coordinates

	Latitude	Longitude
Geographic (WGS84)	46.198488	12.817060
Elevation (m a.s.l.)	258	

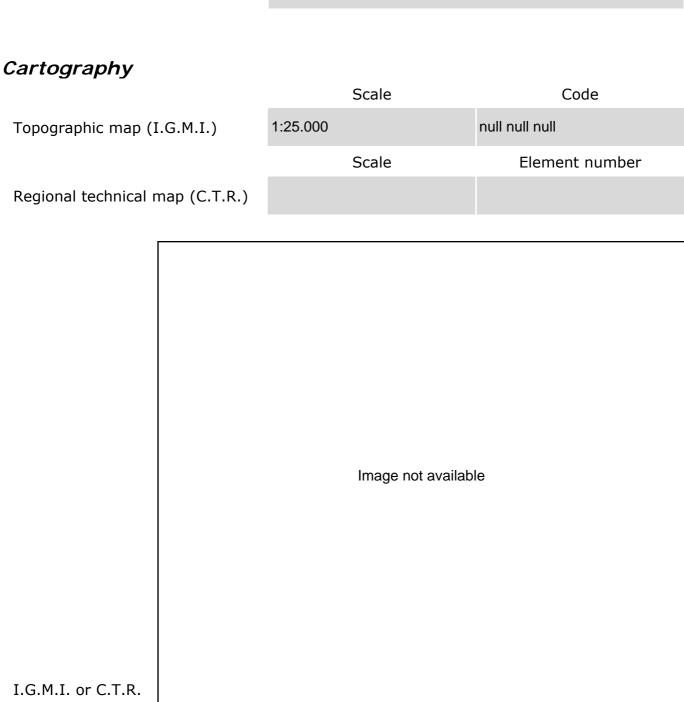

map

Geomorphology

Site morphology


X	Plain	Valley (centre)	Valley (edge)	Alluvial fan
	Saddle	Slope	Edge of scarp	Ridge

Landslides		
Not present		
Procent	Active or quiescent	Distance (m)
Present	Inactive or stabilized	
	Imag	e not available
I.F.F.I. map		
Notes		

Geology

Cartography		Scale	Sheet number	Sheet name
Geological map				
		Image not available		
Fault proximity	certain supposed	(see notes for further informa-	tion)	
Notes				

Microtremor H/V spectral ratio

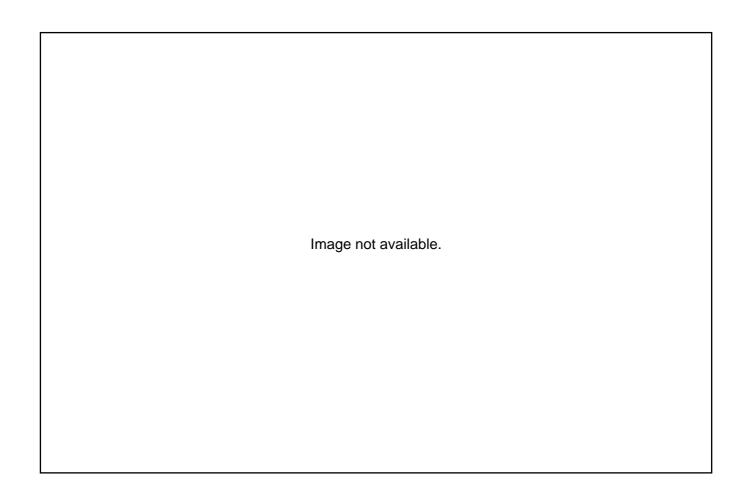

Site classification (EC8 - NTC2008)

Lithostratigraphic classification

Estimated

Method ¹	Soil class ²	Notes

1 GEO Geological data
Legend EC Empirical correlation
HV H/V spectral ratio

Based on in-situ measurements

	Method ³	V _{s30} (m/s)		Soi	l class ²
2 Legend	weaker material at the surface	gical formation, including at most 5 m of $(V_{s30}>800 \text{ m/s})$.	3 Legend	СН	Cross-Hole

B of m in thickness, characterized by a gradual increase of mechanical properties with depth (V_{s30} =360-800 m/s).

C Deep deposits of dense or medium dense sand, gravel or stiff clay with thickness from several tens to many hundreds of m (V_{s30} =180-360 m/s).

Deposits of loose-to-medium cohesionless soil (with or without some soft cohesive layers), or of predominantly soft-to-firm cohesive soil (V_{s30} <180 m/s).

A soil profile consisting of a surface alluvium layer with V_s values of type C or D and thickness varying between about 5 m and 20 m, underlain by stiffer material with $V_s{>}800$ m/s.

3 Legend	СН	Cross-Hole
	DH	Down-Hole
	ES	ESAC
		FK
	MW	MASW
	NW	NASW
	SH	SH-Refraction
	SW	SASW

Topography classification

Topography category⁴

4 Legend T1 Flat surface, isolated slopes and cliffs with average slope angle i≤15°.

T2 Slopes with average slope angle i>15°.

T3 Ridges with crest width significantly less than the base width and average slope angle 15°≤i≤30°.

T4 Ridges with crest width significantly less than the base width and average slope angle i>30°.

Synthesis of information

Information relevant to site classification	Notes		
V _{s30} (m/s)			
Average N _{SPT} to 30m			
Average c _U to 30m (kPa)			
Site class (EC8 - NTC2008)			
Topography category (EC8 - NTC2008)	T1		
Geological, geomorphological and geome	chanical information		
Lithology			
Morphology	Plain		
Rock mass			
Other information relevant to seismic site response			
Depth to bedrock (m)			
Average V_s to bedrock (m/s)			
f ₀ from H/V microtremors (Hz)			
f ₀ from H/V earthquakes (Hz)			
Distinctive features of site response			